

15 inch touch screen supermarket cash register POS machine

(M/N:POS-8617)

**keywords**

cash register supermarket cash register POS machine

**Features:**

1 Intel Celeron J1900 Quad core 2.0 GHZ

1 Hard Driver SSD 32GB (default),SSD 64GB and HDD320G for optional

1 5 wire resistive touch screen(default),Capacitive screen for optional

1 Card reader and VFD customer display for optional

**Applications:**


1 Catering: hotel, restaurant, fast-food restaurant, coffee shop, bakery and cake shop

1 Retailer: Business Street, boutique, department store, cosmetics shop and high-class barbershop

1 Recreation: sauna, spa, night club, theme park, casino and point of sales for lottery ticket

1 Commercial: information management terminals for parking lot, inn, aviation, subway, station and wharf

**Picture show:**

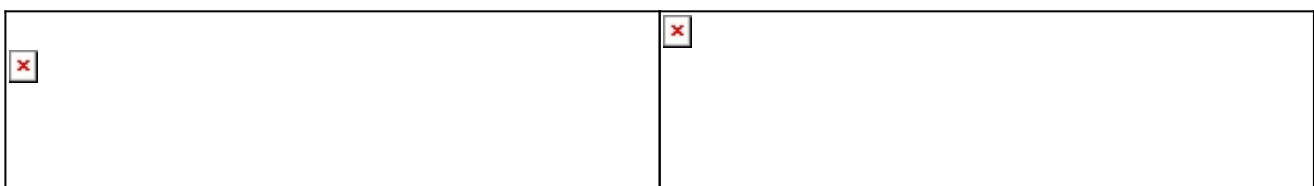

**Parameter**

Model	POS-8617
Color	White
Optional Peripherals	VFD220E
Main Board	Intel Celeron Processor
CPU	Intel Celeron J1900 Quad core 2.0 GHZ
Chipset	Intel NM70
Memory Support	DDRIII 1066/1333*1 2GB (default)

Hard Driver	SSD 32GB (default)
LCD panel Size	15 inch TFT LCD
Brightness	350cd/m <sup>2</sup>
Resolution	1024*768(max)
Touch Screen	5 wire resistive touch screen
View Angle	Horizon: 150; Vertical :140
I/O port	1* power button 12V DC in jack*1
	HDMI*1
	VGA(15Pin D-sub)*1
	LAN:RJ-45*1
	USB(2.0)*6
	RS232*1
	MIC IN*1 Audio out*1
Operating temperature	0°C to 40°C
Storage temperature	-20°Cto 60°C
Compliance	FCC Class A/CE Mark/LVD/CCC
Operating System	Windows XP above, Embedded, WEPOS, Linux
Power adapter	110-240V/50-60HZ AC power, Input DC12/5A out put