#### ∏∏ification∏

384□/□□203DPI□
384_/_ANKA12 * 241.5* 3.0mm
00/00024 * 24003.0000 * 3.0000mm
JAN13[]EAN13[]JAN8[]EAN8[]CODE39
□□  EPSON ESC / POS
OEM437 // OEM850 / OEM860 / OEM863 / OEM865 ///// WPC1252 / OEM866 /
OEM852 / OEM858 / IranII /\ \ \_\ \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
WPC1255 /□□
90/_
57.5±0.5□□
0.06-0.08mm
5000
190 * 132 *119
1.2KG
$\Phi$ 75mm
RS-232DDDUSBDLAN
WIN 9X WIN 20002003_ WIN XPUista
DC12V / 3A
DC12V / 1A
0-45°C[ [[[[] 10-80[
-10-60°C[[[[[]]] 10-90[]















# Application Area

Food delivery, restaurant, Traffic Citation, Logistics, Transportation, Warehouse management, Delivery, Illegal Parking Ticket, Drugstore, Price Tag, Retail/Farm









Parameter

Printing Method	Direct thermal		
Print Density	384dots/line (203DPI)		
Character Size	384dots/line, ANK character, Font: A: 12*24dots, 1.5(W)*3.0(H) mm Simplified/Traditional: 24*24dots, 3.0(W)*3.0(H)mm		
Barcode Type	JAN13 (EAN13) JAN8 (EAN8) CODE39		
Printing Command	Compatible with EPSON ESC/POS		
Language	OEM437/Katakana/OEM850/OEM860/OEM863/OEM865/West Europe/ Greek/Hebrew/East Europe/Iran/WPC1252/OEM866/OEM852/ OEM858/IranII/Latvian/ Arabic/PT151,1251/OEM747/ WPC1257/Vietnam/OEM864/Hebrew/WPC1255/Thai		
Printing Speed	90mm/sec		
Paper Width	57.5±0.5mm		
Paper Thickness	0.06-0.08mm		
MCBF(life)	50km		
Dimension	190*132*119mm		
Gross Weight	1.2KG		
Auto Cutter	manual cutter		
Sensor	Paper Near End Sensor, Paper End Sensor, Cover open sensor		
Roll Paper	Ф75mm		
Interface	RS-232C, Parallel, USB, LAN		
	THE BY THE BOOK THE BOOK THE WESTER THAT THE WAY		


Driver	With ESPON	, vvin vista, vvin / compatible
Printer Supply	DC12V/3A	
Cash Drawer Control	DC12V/1A	C. E. COMP.
Working Temperature	0-45°C, Humidity: 10-80%	at decounter
Saving Temperature	-10-60℃, Humidity: 10-90%	- Pares


## **Paper Roll Installation**



- A Open the printer cover.
  - Install the roller in the roll paper, and put them into the printer.
  - Pull out some paper outside the printer and then close the printer cover.
  - Close the top cover. Press the printer cover to avoid error position of roll paper.
- (Tear-off the paper correctly.)

### Connection

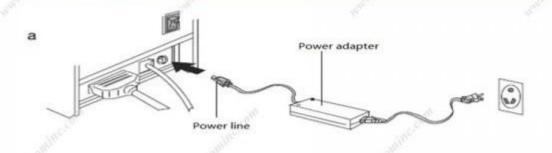

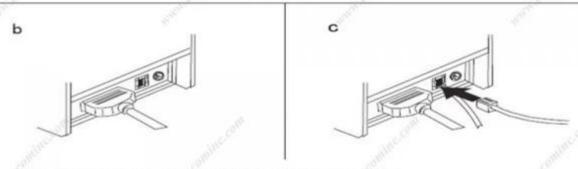

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- C. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

### Shipping and payment

- 1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
- 2. EXPRESS: around 3-7 working days to arrive
- 2. INTERNATIONAL AIR MAIL: unually assured 0.4 days to early will also depend on

- INTERNATIONAL AIR INIAIL. usually around 2-4 days to arrive, will also depend on which destination port
- 4. By sea: depend on which destination port
- 5. T/T
- 6. Western Union
- 7. Escrow
- 8. L/C

## Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,

Together we quest for the best.











