

# CR003IC usb

M / N CR003IC

usb

CR003IC IC

usb

;


T = 0 T = 1 CPU;

USB Android

### 3.

usb	USB RS232
temp	-20°~60°C 0°~50°C
temp	15~85
size	116x36x38.4
<b>IC</b>	
temp	> 200,000
temp	0.75mm
IC	20
IC	50
temp	25
temp	AT24C01A / 24C02 / 24C04 / 24C08 / 24C16 / AT24C64 SLE4432 / 4442 SLE4418 / 4428 ISSI 24C01A / 16 ISO7816-1-4 T = 1 T = 0
<b>usb</b>	
temp	ISO 7811 AMMV CADMV
temp	3~60/
temp	> 600000
pos ition	3
temp	0.76~1.2mm
temp	7

RFID	
Frequency	13.56MHz ISO / IEC14443A / B.
Capacity	> 600000
Reading Distance	1-4cm

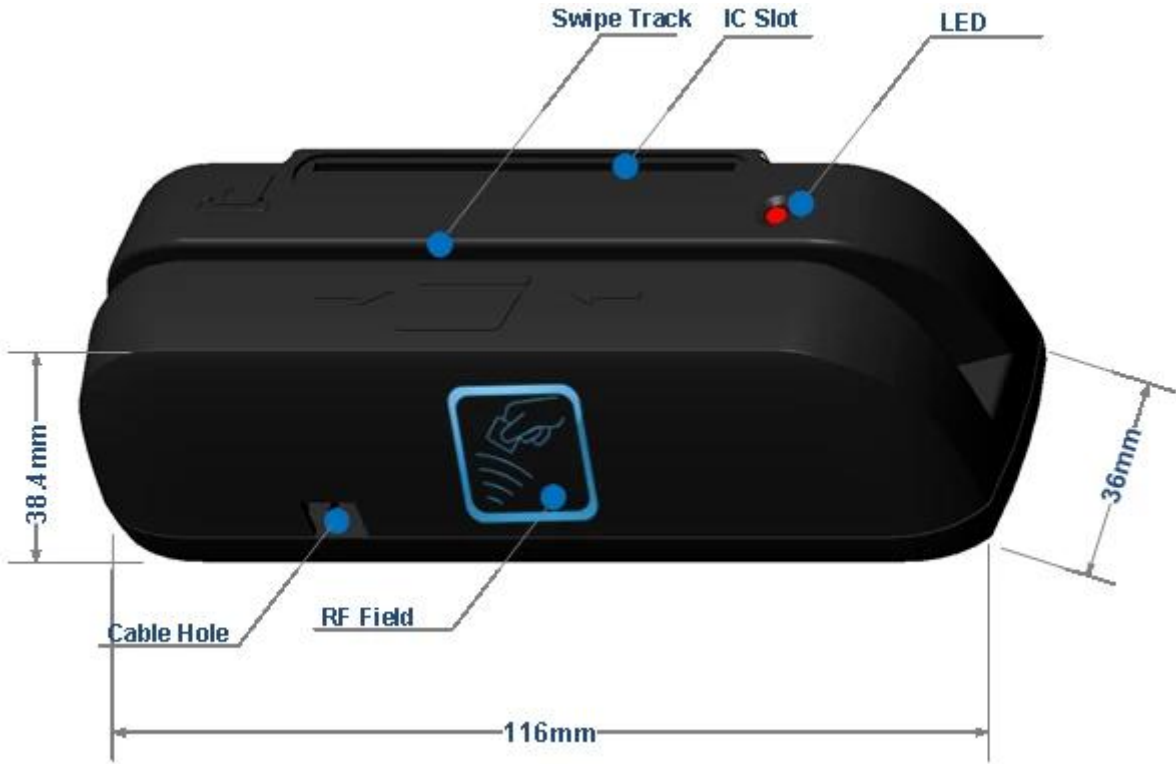



CR003IC





CR003IC





CR003IC





CR003IC





CR003IC





CR003IC







CR003IC





CR003IC

