

# IC

## M / N CR003IC



IC

CR003IC IC

IC

;


T = 0 T = 1 CPU;

USB Android

### 3. IC

IC	USB RS232
IC	-20°C ~ 60°C 0°C ~ 50°C
IC	15 ~ 85
IC	116 × 36 × 38.4
IC	
IC	> 200,000

厚度	0.75mm
IC数量	20个
IC	50个
厚度	25mm
厚度	AT24C01A / 24C02 / 24C04 / 24C08 / 24C16 / AT24C64 SLE4432 / 4442 SLE4418 / 4428 ISSI 24C01A / 16 ISO7816-1-4 T = 1 T = 0
<b>RFID</b>	
厚度	ISO 7811 AMMVACADMV
厚度	3~60mm
厚度	> 600000
厚度	3
厚度	0.76~1.2mm
厚度	7
<b>RFID</b>	
厚度	13.56MHz ISO / IEC14443A / B.
厚度	> 600000
厚度	1-4cm

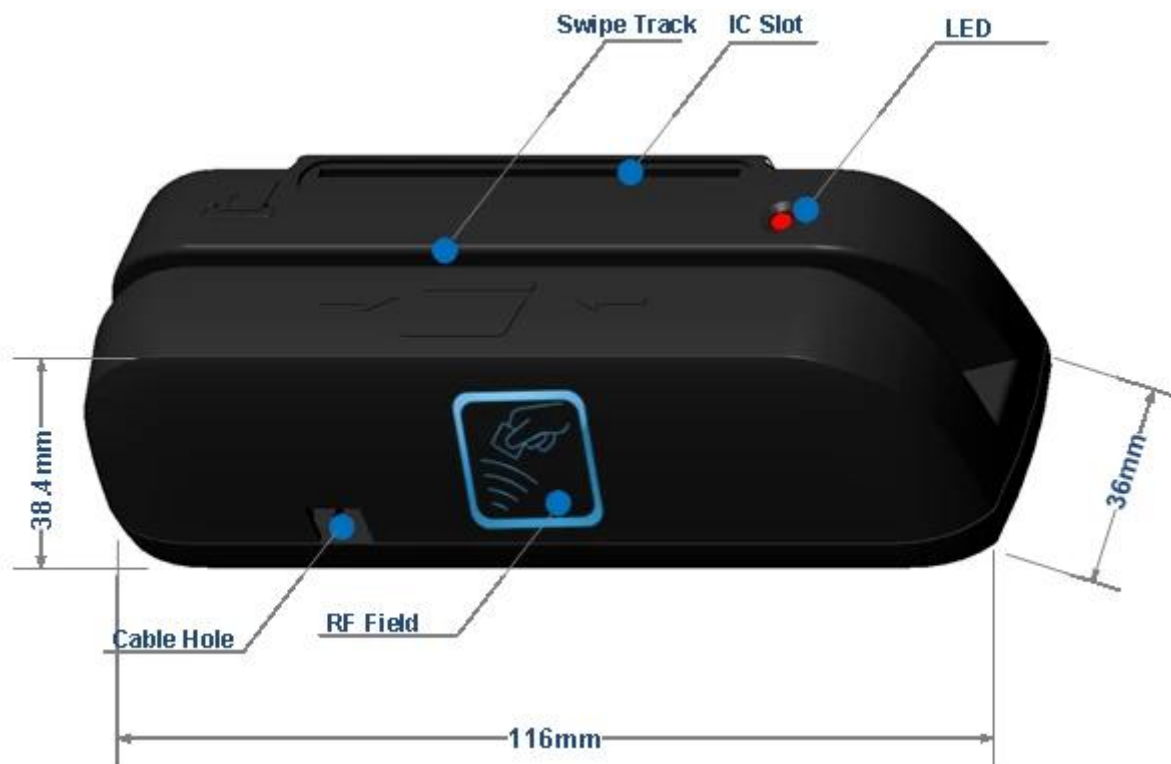



CR003IC





CR003IC





CR003IC





CR003IC





CR003IC





CR003IC







CR003IC





Relevant documents:

[CR003IC-MSR □□□□□□](#)

[CR003IC-RFID □□](#)

[CR003IC-SCard □□□□](#)