

CCD

M / N OCBS -C006

2500 CCD;

280

3mil

/ /

		32 ARM
		2500 CCD
		LED 660nm±10nm
		280
		±55° ±25° ±75°
		60 25mil 40cm 15mil 32cm 10mil 22cm 5mil 11cm 3mil 3cm
		≤110
		≥0.1mm 400
		15
		39 ASCII 39 32 128 93 11 Codabar / NW7 All UPC/EAN/JAN code (EAN-13, EAN-8, UPC-A, UPC-E, EAN-128), Interleave 2 of 5, STD 2 of 5, Industrial 2 of 5, , WPC code matrix 2 of 5, Chinese Postage Code, IATA, MSI/PLESSY, Italian Pharmacy Code, Industrial 2 of 5, BC-412 . UPC-A, UPC-E, Code 128, Code 93, Coda bar, IATA, MSI/PLESSY, Code 32, STD
		4.5 5.5V V1 ±5
		100 110mA
		30 40
		170 60 95
		185
		ABS
		USB
		-200°C 50°C
		-40°C 70°C
		0 98
		0 70,000

□□□□□□	5□□UPC	40mm-160mm
	1000□Code93	20mm-240mm
	1500□EAN13	40mm-250mm
	2000□□□128	40mm-380mm
	4000□□□128	80□□-520□□





OCBS-C006






OCBS-C006





OCBS-C006

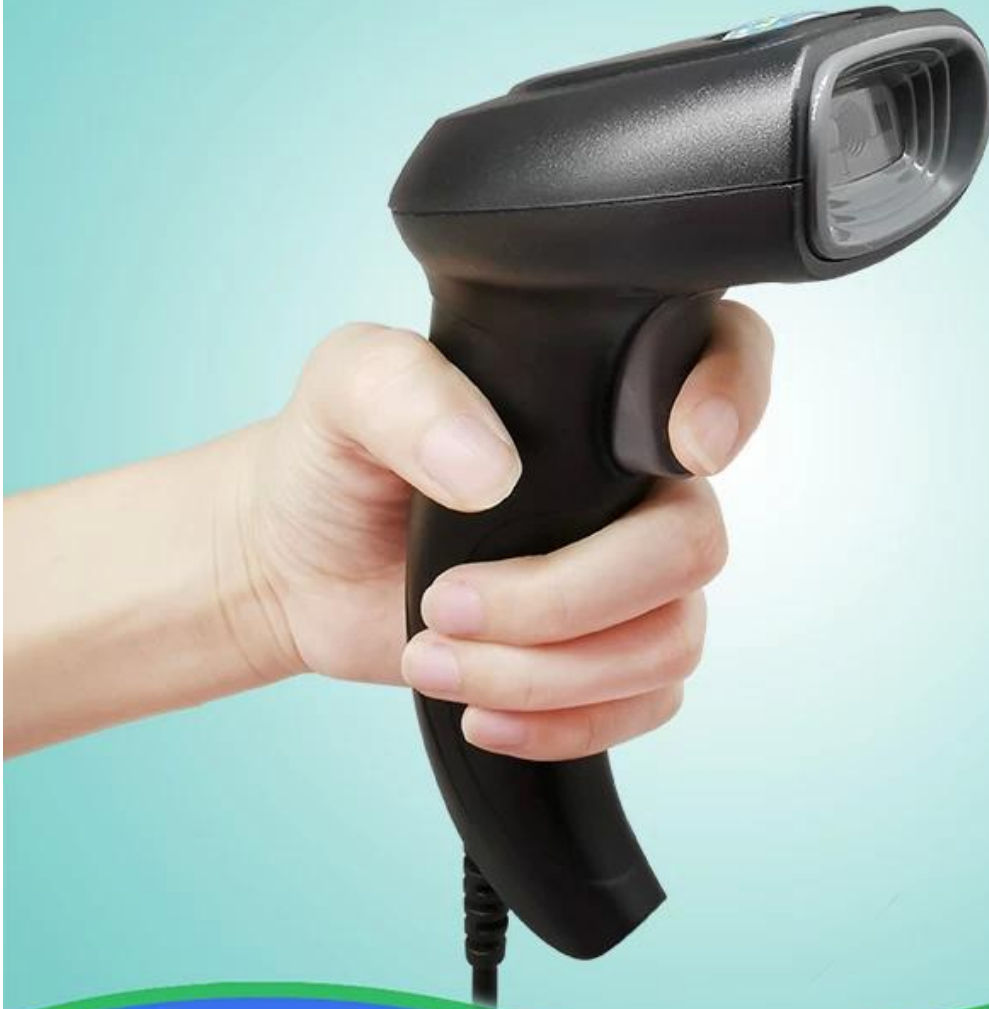



OCBS-C006





OCBS-C006



□□□□

OCBS -C006 □□