

# OCBS -T009 nouveau scanner de codes à barres de bureau de haute qualité

nouveau scanner de codes à barres de bureau de haute qualité

Nombre de lignes de balayage: 20;

Modèle de balayage: 5 directions du champ de balayage;

Capacité de numérisation de ligne multiple / simple, répondre à différentes exigences;

La base peut être enlevée;

Source de diodes laser visibles (VLD) de 650 nm;

Taux de balayage: 1500 balayages par seconde (omnidirectionnel);

Interfaces multiples: KBW, RS232 ou USB en option.

PARAMÈTRES DE PERFORMANCE	
Source de lumière	Diode laser visible 650 nm
Ligne	20 lignes
Taux de balayage	1800 balayages par seconde (omnidirectionnel)
Modèle de balayage	Omni-directionnel: 5 champs de 4 lignes parallèles
Contraste d'impression	32% de différence de réflectance minimum
Capacité de décodage	EAN-8, EAN-13, UPC-A, UPC-E, code 39, code 93, code 128, EAN 128, ISBN, ISSN, Codabar, code 25 non entrelacé, code 25 entrelacé, matrice 2 sur 5, MSI, Pos tBarcode, etc
PARAMETRES ELECTRIQUES	
Interface de support	PS / 2, USB 2.0, RS232
Tension d'alimentation	5VCD ± 12% 1.6W
Niveau laser	Classe2
Certificat	FCC, CE
Indicateur LED	Rouge et bleu
PARAMETRES PHYSIQUES	
Poids (pc)	N.W: 474g / pc G.W: 819g / pc
Taille (pc)	Hôte: 115mm * 110mm * 152mm Emballage: 245mm x165mmx132mm
Poids (carton)	9,6 kg / 10 pcs
Paquet	
Taille (Carton)	680mm * 350mm * 280mm
PATAMÈTRE ENVIRONNEMENTAL	
Résistant aux chocs	Peut résister à 1,5 M en chute libre
Température de fonctionnement	0 à 40 degrés (32 Fahrenheit à 104 Fahrenheit)
Température de stockage	-40 à 60 degrés (-40 Fahrenheit à 140 Fahrenheit)
Humidité	5% à 95% d'humidité relative, sans condensation
Environnement scellé	IP54 (scellé pour résister aux contaminants en suspension dans l'air)



# Multi-line Flatbed Laser Bar code Scanner

OCBS-T009



## Product Picture



## Features

### Reliable with good price

- ▼ Gilded optical technology with 32bit chip, can read reflective, wrinled, fuzzy and colored barcode swimmingly



- ▼ Patented decoding sensor, fast and strong decode capability;



fast

strong

▼ Decoding various barcodes, accommodat more industries applications



A variety of special output format setting,  
adapt to customer' specific applications



### Application place



Bookstore



Supermakte



Pharmacy



Warehouse



Clothing store



Restaurant



## Parameter

PERFORMANCE PARAMETERS	
Light Source	Visible Laser Diode 650nm
Line	20 lines
Scan Rate	1800 scans per second (Omni-directional)
Scan Pattern	Omni-directional: 5 fields of 4 parallel lines
Print Contrast	32% minimum reflectance difference
Decode Capability	EAN-8, EAN-13, UPC-A, UPC-E, Code 39, Code 93, Code 128, EAN 128, ISBN,ISSN, Codabar, Code 25 non-interleaved, Code 25 interleaved , Matrix 2 of 5, MSI, PostBarcode, etc
ELECTRICAL PARAMETERS	
Support Interface	PS/2, USB 2.0, RS232
Voltage Power	5VCD±12% 1.6W
Laser-level	Class2
Certificate	FCC, CE
LED Indicator	Red and Blue
PHYSICAL PARAMETERS	
Weight (pc)	N.W: 474g/pc G.W: 819g/pc
Size (pc)	Host: 115mm*110mm*152mm Package: 245mm x165mmx132mm
Weight (Carton)	9.6 kg/10pcs
Size (Carton)	680mm*350mm*280mm
ENVIRONMENTAL PATAMETER	
Crash resistant	Can withstand 1.5M free fall
Operating Temperature	0 to 40 Degrees (32 Fahrenheit to 104 Fahrenheit)
Storage Temperature	-40 to 60 Degrees (-40 Fahrenheit to 140 Fahrenheit)
Humidity	5% to 95% Relative humidity, Non-condensing
Sealed Environment	IP54 (Sealed to resist airborne particulate contaminants)

## Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

### Production Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

Verified by TUV on 2013.7.15

## Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

## Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

### Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

## Certification:




## Warranty and After Sales:

- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7\*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.



## Packing and Shipment:

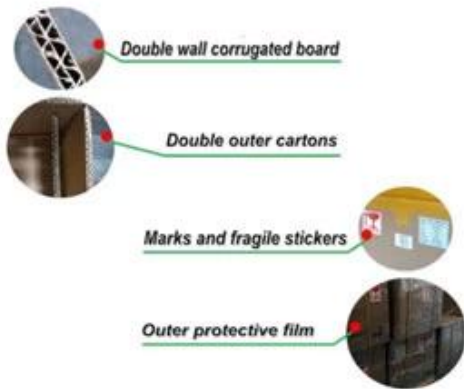

## Payment:



## Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.





## Company Profile

### TRADE ASSURANCE

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer , Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com),

Together we quest for the best.



## Why you choose us?



## Contact us

**Any queries, please contact us immediately, big surprise is waiting for you.**

**Sales Center:**

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Website: [www.ocominc.com](http://www.ocominc.com) [www.possolution.com.cn](http://www.possolution.com.cn);

E-mail: [ocom@ocominc.com](mailto:ocom@ocominc.com), [info@possolution.com.cn](mailto:info@possolution.com.cn) ;

Tel: +86.755.86053207 ext 800;

Fax: +86.755.86053207 ext 868;

QQ: 2485890637, 190852203;

Wechat: szocominc, hj34924238;

Whatsapp: 008613352932860;



## Documents pertinents:

[Manuel utilisateur](#)