

3 pollici con Auto-taglierina termicaBill stampante

(Modello: OCPP-806)

Specifica:

Metodo di stampa	termica diretta
La stampa dei caratteri	576 punti / linee, 512 punti / linea, caratteri ANK
Font	A: 12 * 24dots, 1.5 (W) * 3.0 (H) mm; B: 9 * 17dots, 1.1 (W) * 2.1 (H) mm
Semplificato / Cinese tradizionale	24 * 24dots, 3.0 (W) * 3.0 (H) mm
Tipo di codici a barre	UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) CODABAR / ITF / CODE39 / CODE93 / CODE128
Velocità di stampa	300 millimetri / sec
Interfaccia	+ USB Serial + Ethernet
comando stampa	Compatibile con ESC / POS
Autisti	Win9X / Win2000 // Win2003 / Win Vista / Win 7 / Windows XP /, compatibile con ESPON
Larghezza di stampa	79,5 ± 0,5 millimetri (72 millimetri di larghezza di stampa)
Diametro di carta	83 millimetri
Spessore carta	0.06-0.08mm
fresa	taglierina automatica
Affidabilità di stampa	100 km
Energia	DC24V / 2.5A
Temperatura	0-45 gradi
Contrasto Umidità	10-80%
Dimensione esterna	195D * 155W * 148H mm
Peso lordo	2.70kg
Pacchetto	Box interno: 29 * 21 * 17cm; Formato della scatola (8 pezzi): 60 * 44 * 36 (cm)

Dettagli del prodotto:



**80mm Thermal Receipt
Printer with auto-cutter
OCPP-806**



Product Picture





Features

Simple but not easy

Water-proof and grease-proof.



Support NV image downloading and printing
Support different density bitmap graphics printing



Support raster bitmap printing



USB+Serial +Ethernet



High Printing Speed
(Max 260mm/second)
Auto Cutter Optional



Characters can be amplified, printed in bold optionally, and line spacing printing can be adjusted



All-round show





Application Area

Food delivery, restaurant, Traffic Citation, Logistics,
Transportation, Warehouse management, Delivery, Illegal
Parking Ticket, Drugstore, Price Tag, Retail/Farm



Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.
- E Tear-off the paper correctly.

Setting the Printing Mode(DIP switches):


The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.

Parameter


Printing Method	Direct Thermal
Printing Character	576 dots/line, 512 dots/line, ANK characters
Font	A: 12*24dots,1.5(W)*3.0(H)mm; B: 9*17dots,1.1(W)*2.1(H)mm
Simplified/Traditional Chinese	24*24dots, 3.0(W)*3.0(H)mm
Barcode Type	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)CODABAR/ITF/CODE39/CODE93/CODE128
Printing Speed	300mm/sec
Interface	Parallel or Serial + USB + Ethernet
Printing Command	Compatible with ESC/POS
Drivers	Win9X/Win2000/Win2003/Win Vista/ Win 7/Window XP /, compatible with ESPON, SAMSUNG
Printing Width	79.5±0.5mm(print width 72mm)
Paper Diameter	83mm
Paper Thickness	0.06-0.08mm
Cutter	Auto cutter
Printing Reliability	100km
Power	DC24V/2.5A
Temperature	0-45 degree
Contrast Humidity	10-80%
External Dimension	195D*155W*148H mm
Gross Weight	2.70kg
Package	Inner Box: 29*21*17cm; Carton Size (8 pcs): 60*44*36(cm)



1. Remove the DIP switches cover on the bottom of the printer.




2. DIP switches setting




Connection


a

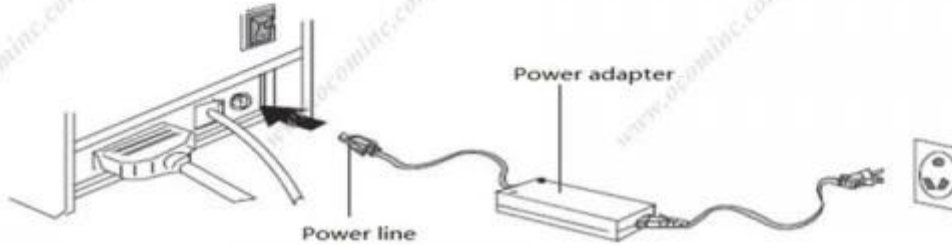

b



c

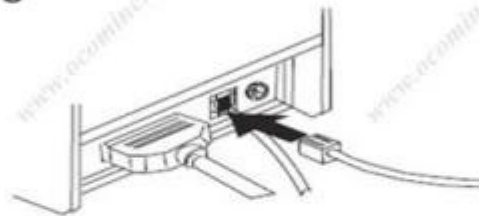

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow
8. L/C

Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

For more information, please contact us at info@ocom.com

You can find more information of us at: www.bocominc.com,
Together we quest for the best.



Documenti rilevanti:

[*specificazione](#)

[*Manuale di programma](#)

[*Manuale di istruzioni](#)

[*Driver for Windows](#)

[*Driver per Linux](#)

[*Parametri stampante attrezzi di regolazione](#)

[*Printdemo USB\(Application Software demo\)](#)

[*SDK per Android](#)

[*CD File](#)