

| | |
|------------------------------|--|
| Modello | - T2 |
| Nome | 5,5 Pollici touchscreen cUNpacitiVo, Supportoare la firma elettronica |
| Batteria | 3.8 V/ 64 00mAh |
| Adattatore di alimentazione | Ingresso:100-240 V , 50/60Hz ,1,5 A Produzione: 5 V DC /2 A |
| Interfaccia del caricatore | USB tipo C |
| Schermo principale | Touchscreen HD da 5,5 pollici visualizzazione |
| Risoluzione | 720*1280IPS |
| Prestazione | |
| processore | Processore Deca-core MT6797 Tri-Cluste-A72*2A53*8 da 2,3 GHz |
| RAM | 3 GB |
| Veloce | Flash da 16 GB |
| Comunicazione | 2G/3G/ 4G |
| Sistema operativo | Androide 8.0 |
| Pulsante | Pulsante di accensione, pulsante di scansione ,Pulsante del volume |
| Bluetooth | Bluetooth 4.0 |
| WIFI | WIFI 802.11 b.g.n.ac |
| Stampante | Ricevuta termica da 58 mm ed etichetta Stampante |
| Rotolo di carta | Larghezza: 58 mm; Diametro: ≤40 mm |
| Scanner | 5 Megapixel Decodifica della fotocamera , Scanner 2D (opzionale) |
| NFC | Supporta ISO/IEC 14443A&B, Mifare, carta felica |
| Slot SIM | Sim*2 (predefinito) o Sim*1Sam*1 per opzione |
| Altoparlante | Altoparlante audio digitale |
| Dito p stampa | FBI/STQC Dito p stampa (Opzionale) |
| GPS o AGPS | Supporta GPSAGPS |
| MDM | Support |
| Accessori periferici | |
| Accessori | USB tipo C*1 |
| | In carica adattatore*1 |
| | manuale utente*1 |
| Ambiente | |
| Temperatura di esercizio | 0 a 40 gradi centigradi |
| Temperatura di conservazione | - 10 a 60 gradi centigradi |
| Umidità di lavoro | 10%~80% |
| Umidità di stoccaggio | 10%~90% |

SMART Handheld POS Terminal

MULTI-PLATFORM AUTOMATIC PRINTING
easy to deal with a variety of working environment





Thermal Receipt
Label Printing



Touch HD
Screen



Multi-version
Connection



5 Million
Pixels



3GB+16GB
Standard



Removable 6400mAh
Large Capacity Battery



NFC
Standard



CPU
Deca-core

Multiple versions Connection options

Support full Net-com, Bluetooth, WIFI multiple versions of connection, Excellent experience




Support 2.4G&5G

Built-in NFC Module

2G/3G/4G communication

Support Download APP from Google Play Store

High Quality and Performance, Your reliable POS

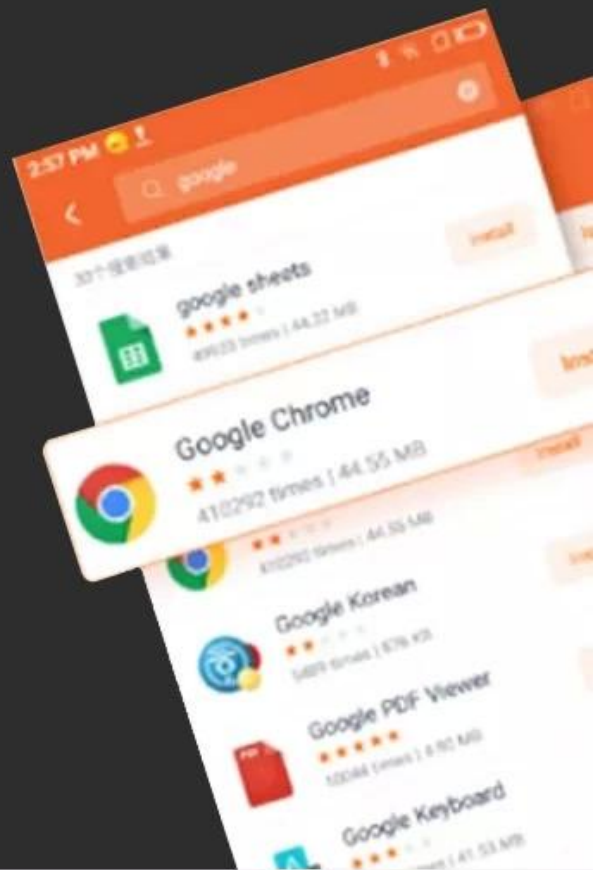

Large paper bin Print more durable

Can accommodate 42mm diameter thermal paper to avoid frequent paper changes and improve printing efficiency.

58mm

Maximum
paper width

42mm

Maximum
paper diameter



■ SMART PRINTING


Thermal Receipt / Label Printing

Built-in high speed 58mm thermal receipt and label printer




5.5-inch HD IPS Screen

720*1280 resolution, stable every pixel, allowing users to see more clearly

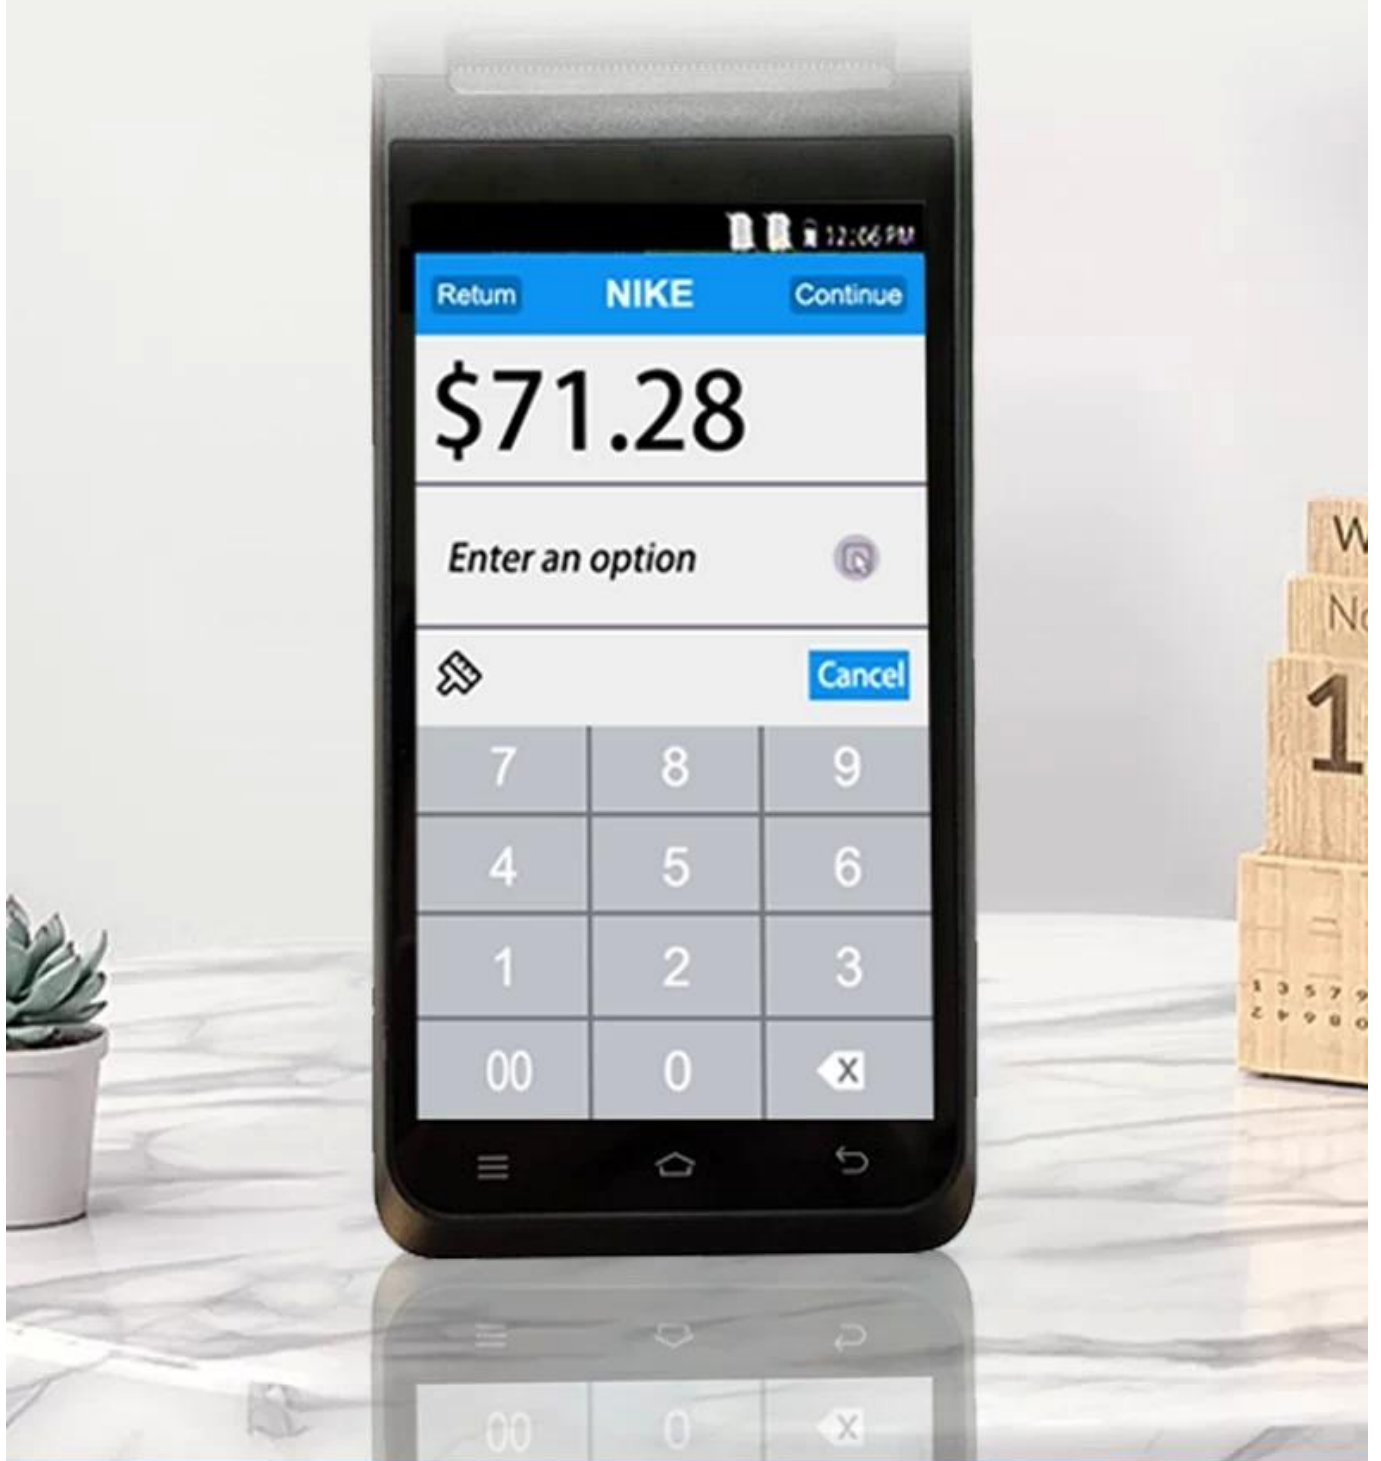

2D Barcode Scanner for Optional

5 Million Rear HD Camera
quickly identify barcodes QR codes
record important information



Scan code



Photo



Video



NFC Contactless Card

NFC contactless card reader payment function

