

OCKP-8001 58/80mm High Speed Embedded Kiosk Thermal Printer

(M/N:OCKP-8001)

Feature:

160mm/s printing speed,

80mm diameter oversized paper house

58 or 80mm paper house width adjustable

Support Auto cutter

Support multiple countries language code pages

Support graphical printing

Support NV logo storage and printing

Support multiple 1D and 2D barcode printing

Printer head life 100km,cutter life one million times

Specification:

| | |
|---------------------|--|
| Printing method | Direct thermal |
| Printing speed | 160mm/s |
| Paper roll diameter | Φ80mm |
| Column capacity | 576 dots/line |
| Paper thickness | 0.06~0.08mm |
| Interface | USB +RS232+parallel port |
| Character | GB18030 and multiple countries language code pages |
| Character size | ANK□Font A□1.5×3.0mm□12×24 dots□ Font B□1.1×2.1mm□9×17 dots□ |
| Barcode types | UPC-A/UPC-E/JAN13□EAN13□/JAN8 □EAN8□/CODE39/ITF/CODABAR/CODE93/CODE128 2D:QRCode /PDF417 |
| Input buffer | 32K bytes |
| NV Flash | 64K bytes |
| Power adaptor | DC24V/2.5A |
| Cash drawer output | DC 24V/2.5A |
| Weight | 0.96KG |
| Dimensions | 140×142×110.7mm (D×W×H) |
| Work environment | Temperature (0□45) humidity(10□80%) |
| Storage environment | Emperature(-10□60°C) humidity(10□80%) |
| Printer head life | 100km |



OCKP-8001








OCKP-8001



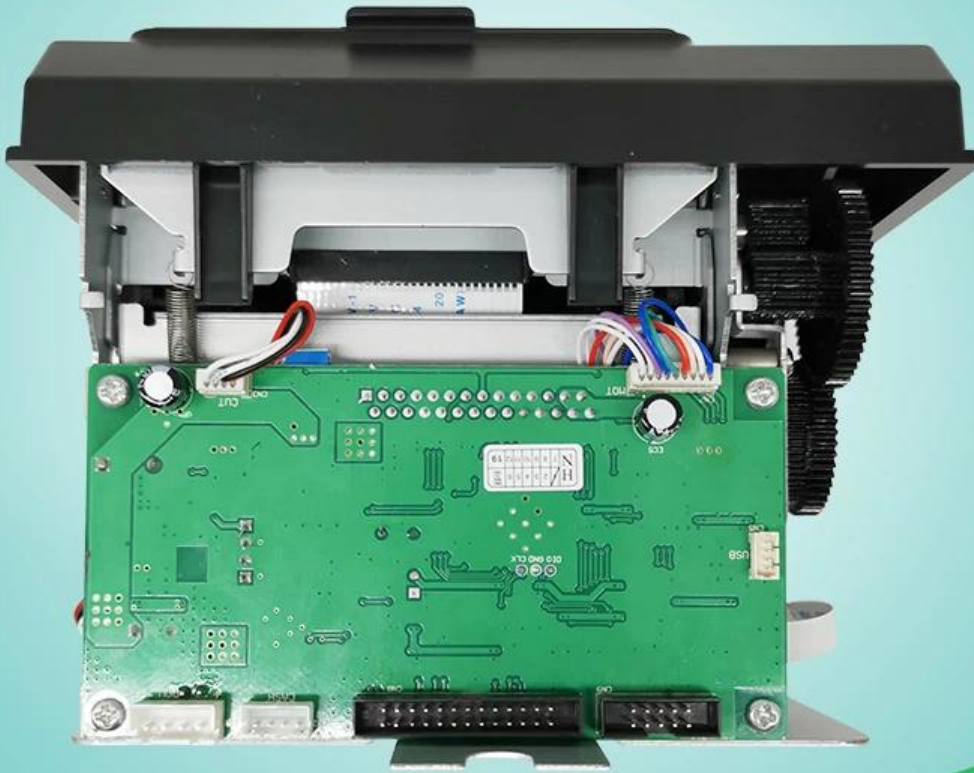



OCKP-8001





OCKP-8001





OCKP-8001





OCKP-8001






OCKP-8001






OCKP-8001



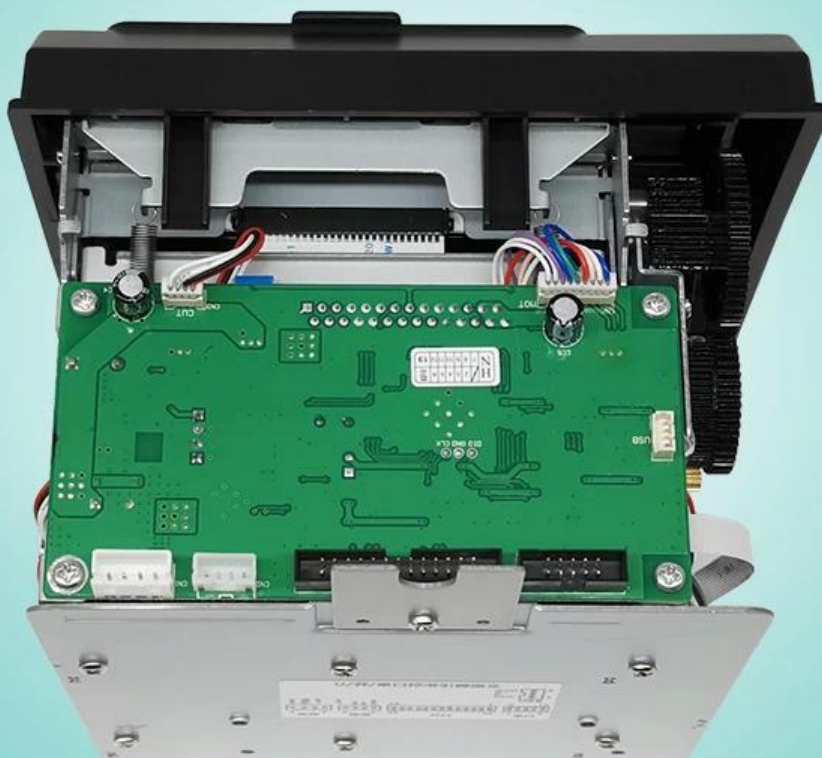



OCKP-8001

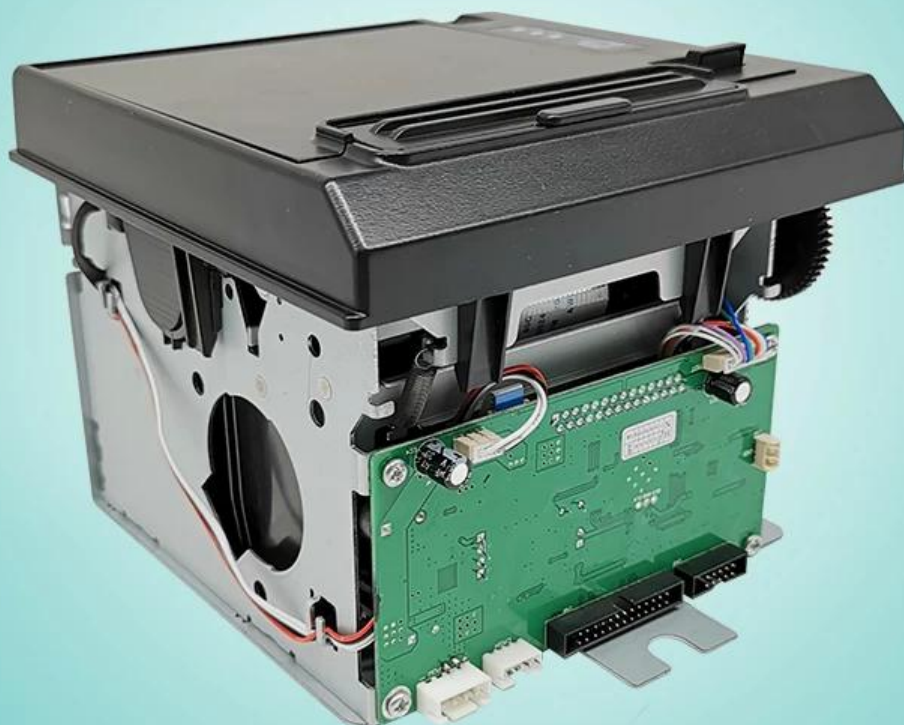



OCKP-8001

