## **11.6 Inch All In One Android/Windows POS terminal**

## with Printer, Scanner, Display and RFID

(M/N:POS-M1162-W/A)

OCOM M1162 POS machine can be installed windows or android OS for choosing, its higly intergration make many functions realized just by one POS, this smaller size model save customers much space and cost-effective.

## Features:


Intel Celeron series and intel I3 I5 or RK3568 CPU for option; Hard Driver Msata SSD 64GB, SSD 128GB an 256 GB for option; 80mm high speed thermal printer built in; Multi-point projected capacitive touch panel; VFD220 customer display mounted to back cover; NFC card reader,bar-code scanner as option; Ture flat and water-proof scratch-resistant surface display.

Model	POS-M1162-W	POS-M1162-A
Name	11.6inch all in one Windows touch screen pos terminal	11.6 inch all in one Android touch screen pos terminal
Housing	Plastic with metal combined	
Color	Black and white color	
Display		
Main screen size	11.6 inch IPS touch screen monitor	11.6 inch IPS touch screen monitor
Resolution	1366*768,1920*1080 for option	1366*768,1920*1080 for option
Brightness	300cd/m2	
View angle	Horizon: 160; Vertical: 150	
Touch screen	Multi-point projected G+G capacitive touch	
Vice screen	4.3inch lcd display, resolution 800*480 for option	
Customer display	2*20 VFD mounted to back cover for option	
Performance		
Motherboard	Intel Celeron Bay Trail J4125 2.0GHz, intel core I3/I5 for option	ARM Cortex-A17 -RK 3568 quad core 2.0GHz CPU
System Memory	1*SO-DIMM DDR4 slot, 2133 Mhz 2GB/4GB 8GB for option	On board 2GB DDR4
Storage device	Msata SSD 64GB or higer, up to 256GB	8GB eMMC, support 32GB TF card expanded

## Specification

Audio	On board Real Tek ALC662 audio chip	On board Real Tek audio chip ALC5640	
LAN	10/100Mbs, Realtek RTL8111F Lan chip built in Mini PCI-E slot, support embedded WIFI module	10M/100M RTL8201F, 10M/100M/1000M RTL8211E for option	
Operating System	Windows10/11	Android 11	
Connectivity			
External I/O port (J4125/RK3568)	Power button*1		
	12V DC in jack*1		
	COM(RS232) * 1		
	LAN: RJ-45*1		
	USB *5		
	RJ11 for Cash drawer *1		
	VGA(15Pin D-sub)*1	TF card slot*1	
	MIC in*1 Audio out*1	N/A	
Options			
80mm thermal printer	r Direct thermal printing, support label and receipt		
	200mm/s pringting speed		
	79.5-/+ 0.5mm paper width and printable width 72mm		
	With atuo cutter function and thermal head life 100km		
speaker	8ohm/3W speaker		
WIFI	IEEE 802.11 a/b/g/n		
comunication	3G/4G		
NFC card reader	ISO14443TypeA		
scanner	1D/2D barcode decoding		
camera	5.0MP/Auto focus,support 1D/2D		
Battery	6000mAh large capacity battery		
Package			
Weight	Net: 3.1Kg, Gross: 3.8Kg		
Package with foam inside	180*370*380mm		
2 in 1 carton	370*365*392/12kg		
Environment			
Operating temperature	0 to 40 degrees centigrade		
Storage temperature	-10 to 60 degrees centigrade		
Working humidity	10%~80% No condensation		
Storage humidity	10%~90% No condensation		
Accessories			
Power adapter	110-240V/50-60HZ AC powerinput ,DC12/7A output adaptor		
Power cable	Power cable plug compatible with USA /EU / UK etc and customized available		
CD driver	Motherboard driver and touch driver inside		
Other			
Compliance	FCC Class A/CE Mark/LVD/CCC		



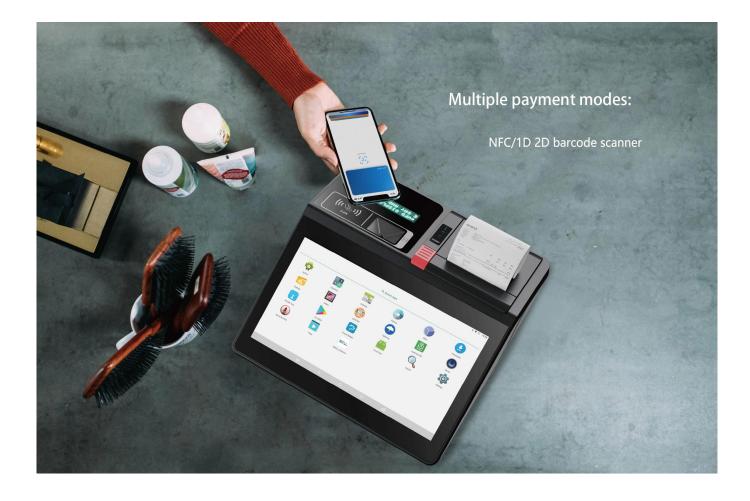





\* Product specifications subject to change without prior notice